GREENPORT
WING

Ready-to-install module carrier for covering substructures

- Bifacial double-glazed modules from Austria, approved for overhead installation. Up to 30 % additional yield, 15 % light transmission and a visually sophisticated design
- Average PV output of approx. 2,5 kWp per module carrier
- Easy to mount on a substructure such as a carport or terrace
- No need to glue and seal the PV modules on construction site
- Completely pre-assembled for a quick and easy crane installation
- 6 pcs. of 420 Wp modules per module carrier
- Perfect weather and sun protection
- Rainproof, hail resistance class HW4
- Snow load up to 2.0 kN/m²

High-quality and smart roofing
- with GREENPORT WING

GREENPORT - a brand of GREENoneTEC SOLAR INDUSTRY

Model	GREENPORT WING
Covering	by means of DIBt-certified, frameless bifacial double-glazed modules from Austria
Steel construction	according to EN 1090 - 1, EXC 2, assessment group C
Corrosion protection	galvanized and painted according to DIN EN ISO 12944/2018 in C3H, default colour RAL 7016, other RAL colours on request
Dimensions (W x H x D)	2420 x 5358 x 130 mm
Snow load	up to 2,0 kN/m²
Number of modules	6 pcs. PV modules per module carrier
Weight	approx. 325 kg
Light transmission	15 %
PV module	**DIBt-certified, bifacial double-glazed module without frame**
Power per PV module	420 Wp
Efficiency	20,41 %
Dimensions (W x H x D)	1766 x 1165 x 7 mm, thickness of glass 2 x 3 mm
Weight	30,0 kg
Applicable standards	conformity to IEC 61215 and IEC 61730; IP 65; DIBt Z-70.3-266; hail resistance class HW4

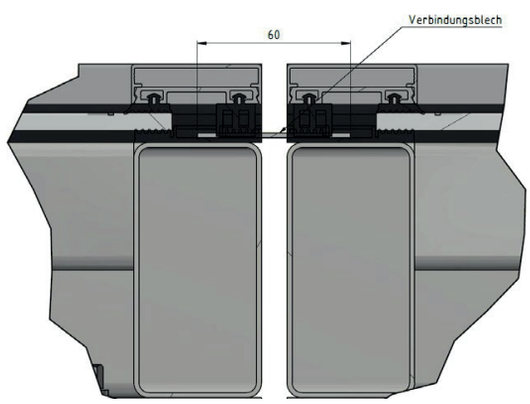

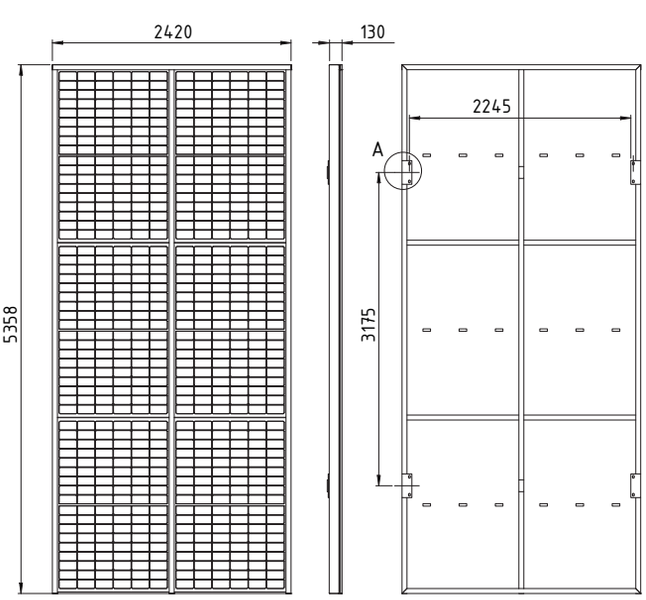

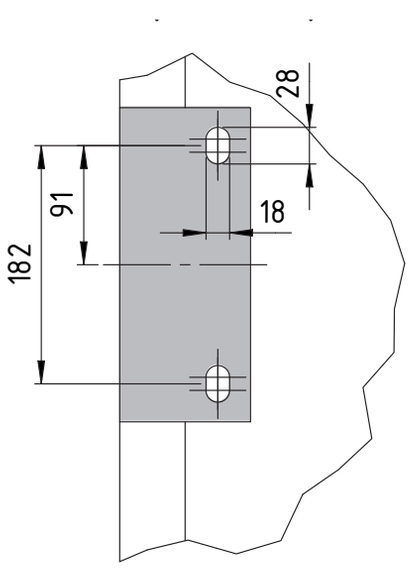

Deutsches Institut für Bautechnik DIBt